



myShark

Electromechanical underground operator for swing gates up to 3 m.

A strong gearing system made out of bronze and a noiseless powerful waterproof gear motor made fully of aluminium.


This operator is the most discrete way to automate a gate.

It owns built-in adjustable mechanical limit switches in opening and closing position.



It allows an opening angle up to 110° (standard) or 180° (adapter needed).

It can be supplied in 230V and 24V.


The 24V version is suitable for an intensive use and it can be equipped with a backup battery in case of power cut.

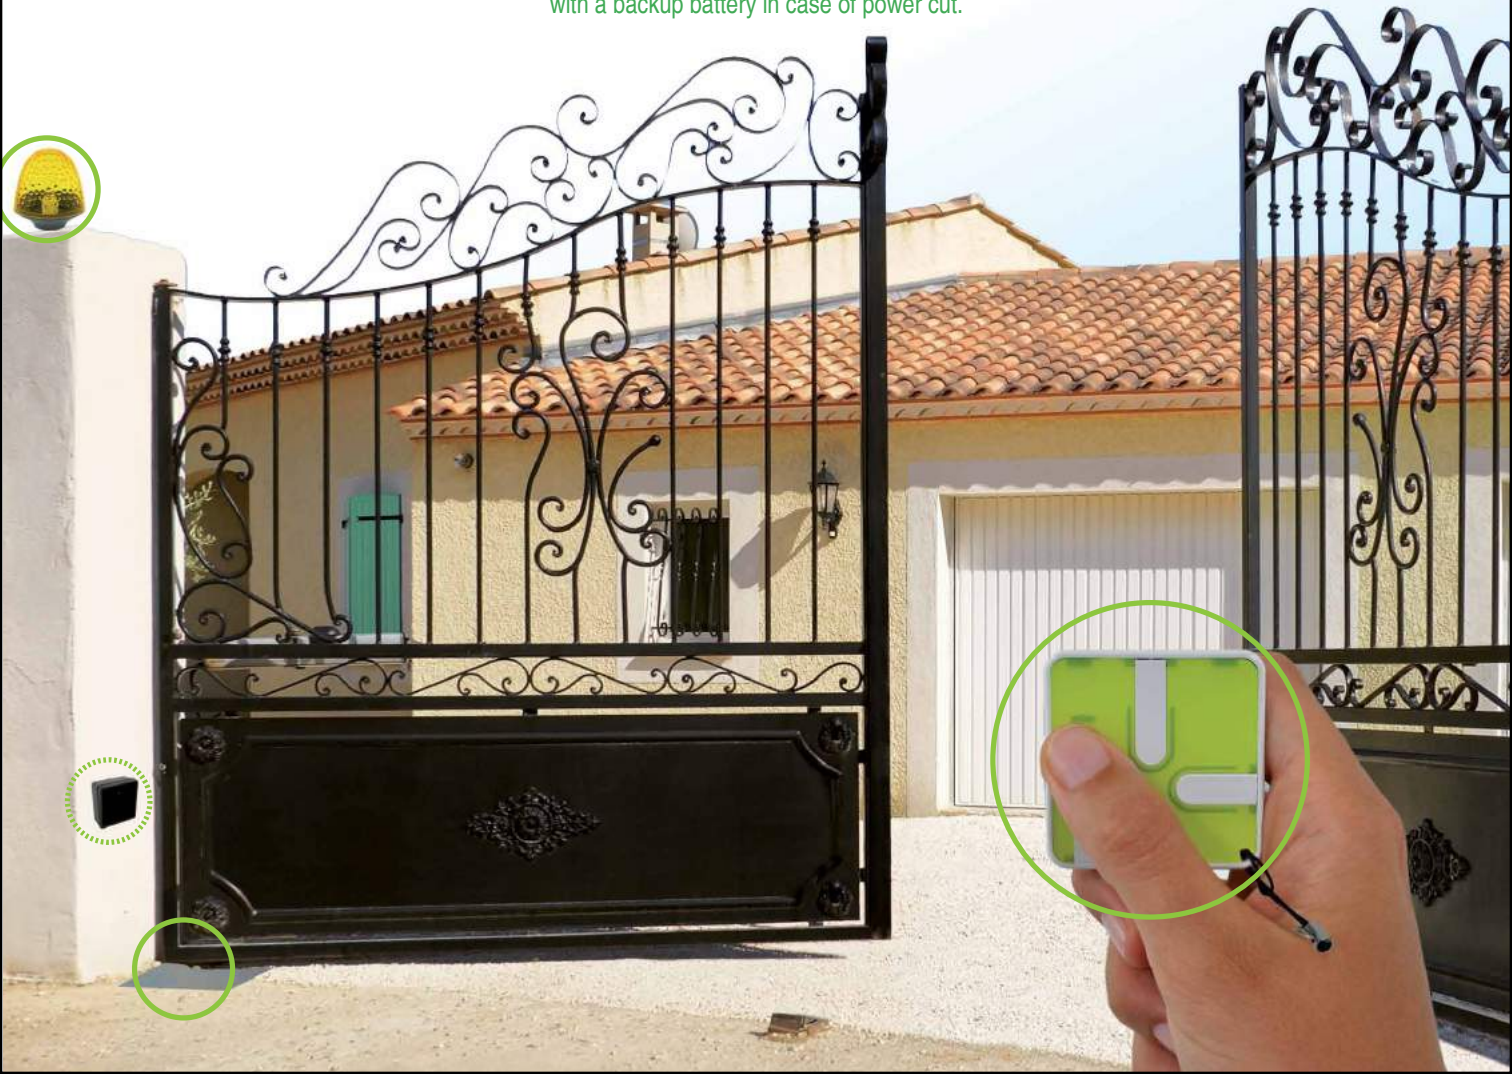

160

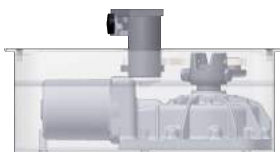


315

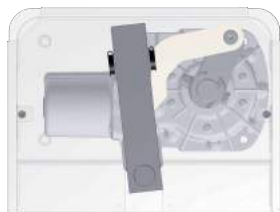

415


WITH 180° OPENING DEVICE

OUTER VIEW
INNER VIEW




180°

OUTER VIEW
INNER VIEW



90°

OUTER VIEW
INNER VIEW



110°



OPTIONAL



myShark24

myShark

| | | | |
|---------------------|--------------------|------------|---------|
| Power supply | V | 24Vdc | 230V |
| Current | A | 0,5 - 0,75 | 1,2 - 2 |
| Motor power | W | 50 | 300 |
| Capacitor | μF | ----- | 10 |
| Thermic protection | C° | ----- | 150° |
| Max thrust | N/m | 230 | 350 |
| IP protection class | IP | 66 | 66 |
| Revolution speed | rpm | 1600 | 1400 |
| Opening time | m/min ¹ | 16 | 17 |
| Duty cycle | % | 90 | 50 |

myShark24

myShark

| | |
|-------|-------|
| 24V | 230V |
| 110° | 110° |
| 200Kg | 350Kg |
| 2,50m | 3m |

